

# 55N500B088

## 55" Videowall Screen



- Optional FRC up to 120Hz
- 10 Bit LVDS
- Support 3840 x 2160/30Hz
- 4K Signal Input
- Any input signal can be 4K looped & output by DP
- Temperature Control Function
- Sleep Mode
- Auto Adjust
- 3D MADI Combfilter

### Narrow Bezel

Bezel to bezel 0.88 mm video wall displays with 55 inch 500 nits will create visually stunning digital wall that is easily installed, maintained and managed.

### Wide Viewing Angle

IPS technology allows you to watch the screen virtually at any angle. It is ideal for small scale meeting rooms to large scale conference rooms.

### Brightness Uniformity


It ensures high-quality, even image and light delivered across displays.

### 24/7 Reliable

4TheWall Video wall screens are design for use in 24/7 control rooms and the critical environments that demand continuous operation

### Management

You can manage your Video wall panel over your PC with control management software.

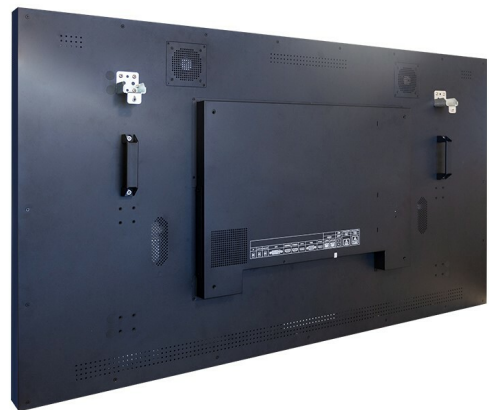

## Technical Specifications

55N500B088

Input and Output	
Inputs	DP, 2 x HDMI , DVI , VGA, RS232, Audio Stereo , IR
Outputs	DP, RS232, Audio Stereo, IR , Optional 2x2W Speaker
Panel Specification	
Aspect Ratio	16:9
Maximum Resolution	1920 x 1080P
Pixel Pitch	0.630mm x 0.630mm
Luminance	500 cd/m2
Contrast Ratio	Static: 1400:1 / Dynamic: 500.000:1
Display Color	10 bit, 1.07 Billion Colors
Viewing Angle	178/178 degrees
Response Time	8ms
Outline Dimensions	1213,4mm x 684,3mm x 69,2mm
Active Display Area	1209,6mm x 680,4mm
Life Time	50.000 Hours
Display Orientation	Portrait / Landscape
Bezel to Bezel	0.88mm
Screen Bezel	0.44mm (U/L/R/B)
Power Consumption	
Active 150 Watt	
Standby<1W	
General Features	
Power Supply	AC 100-240V, 50/60Hz , 10-5 Amp
Working Temperature	0°C~ +50°C
Humidity Range	20% ~ 80% (non-condensing)
Storage Temperature	-20°C~ +60°C
ESD Protection	±8kV (air-gap discharge), ±4kV (contact discharge)

