Professional IP Monitor – مانیتور های تحت شبکه

- CH-L240-1HDVSLB-IP16

Special features

- H264 compression format
- VGA/ DVI-D and Full HD Input
- Real-time display
- Graphical and text interfaces (GUI)
- Use Ethernet connection control
- Support HDMI video output (1920 x 1080 @30)
- Supports up to four network cameras via HUB
- Supports network protocols TCP/IP, DHCP, DNS, HTTP, SMTP
- System login

24" HD

Monitor Connection

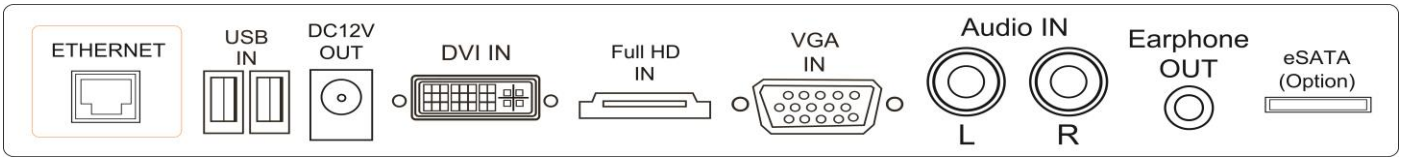

Specifications

Model	CH-L240-1HDVSLB-IP16
LCD panel	24“
Visible area (mm)	531.3 x 298.8
Picture format	16:9
Max. resolution	1920x1080
Pixel dot pitch (mm)	0.276.7 x0.276 .7
Colours	16.7M
Brightness	250 cd/m² [LED]
Contrast	3000:1
Response time(Tr/Tf)	1.5/3.5 ms
View angle (U/D/L/R)	89/89/89/89
Full HD input	1x Full HD
Audio input(R/L)	2x (RCA)
PC input	1x VGA input 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
IP Video support	16x(1920*1080)+sub(960*576)+4Ref.+16Sub_Play/4Main_ Play 16x(1280*960)+sub(960*576)+4Ref.+16Sub_Play/8Main_ Play 9x(2048*1536)+sub(960*576)+4Ref.+9Sub_Play/4Main_ Play 9x(2592*1944)+sub(960*576)+4Ref.+9Sub_Play/1Main_ Play
OSD setting	Yes
Network Port	1x RJ45, 10M/100M
USB Port	2x USB 2.0 ports
HDD Port	1x e-SATA port
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 27watt
Dimensions (WxHxD) mm	586 x 353.3 x 61.6
Weight	5.8 kg
Operating temperature	0° to 40° C

تهران - خیابان سهروردی شمالی - خیابان خرمشهر نبش کوچه ویدا پلاک ۱۲۰

تلفن : ۸۸۷۳۶۵۷۱ - ۸۸۵۰٤٥۲٤ ایمیل : Sales@Amout.com سایت : WWW.Amout.com

Hsintek
WWW.HSINTEK.COM.TW